


CORD FOR TEMPERING EQUIP.

Use : To cover the chiller / quench and cooling section conveying rolls

THE BEST QUALITY & DURATION

Type: GMC CORD® 125A
Sizes : 12 x 5,5 mm – colour brown yellow, shiny – slightly soft
Delivery time: From stock

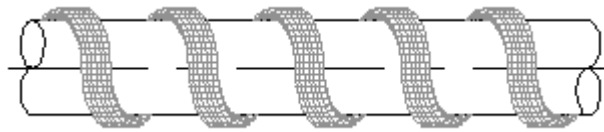


THE QUALITY & DURATION

Type : GMC CORD® 55B+ (the most common) to 125B+
Sizes : 5 x 5 mm, 8 x 3 mm, 10 x 3 mm, 12 x 3 mm up to 12 x 5 mm
Other sizes as per request – colour yellow, matt – soft
Delivery time: From stock or short delivery time.

THE COMPROMISE QUALITY & PRICE

Type : GMC CORD® 55B to 125B
Sizes : 5 x 5 mm, 8 x 3 mm, 10 x 3 mm, 12 x 3 mm, 12 x 4 mm up to 12 x 5 mm
Other sizes as per request – colour yellow, shiny – more hard than B+
Delivery time: From stock or short delivery time.

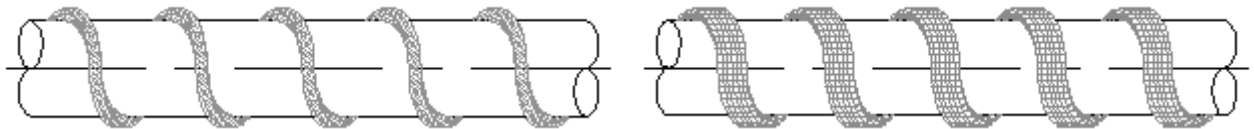

Sizes : Ø 5 mm, 6 mm, 8 mm on request

THE PRICE

Type : GMC CORD® 55C to 125C - colour yellow, matt – soft – short fibbers – life time shorter

You are daily using glass tempering equipments, you are very concerned by this information letter. Specialized in the field of glass toughening process over 35 years, we have developed two basic items which might interest you in order to maintain well your horizontal tempering equipment and have the insurance of a good surface quality for toughened glass, at the lower cost.

GMC For Glass Industry
France, ☎ 33(0)4 72 50 52 55 fax 33(0)4 72 50 51 13
Web site : www.gmcforglass.com

Email: gmc@gmcforglass.fr