JF-2 series Surface Stress Meter

The JF-2 series are developed for measuring the surface stress of chemical tempered glass.

JF-2E

JF-2C

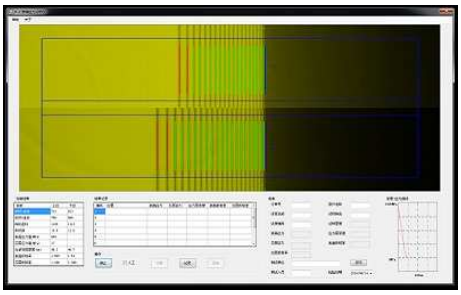

Single ion exchange glass

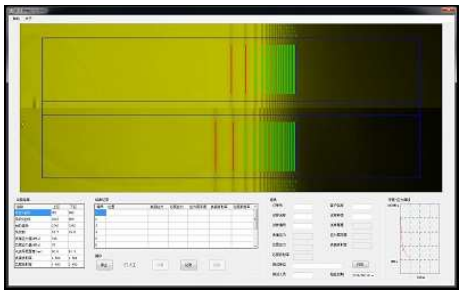

Double ion exchange glass

Feature:

Easy operation
Small size
Single / double ion exchange glass
Manual operation in case of bad image (with PC software)

Specification:

Refractive Index: 1.47~1.53(other RI range customized according to requirement)
Stress :1500MPa
Depth: 100um
Accuracy: 20 Mpa/5um
Light source: 590/750 nm
Operation System: JF-2E integrated PDA or JF-2 PC software (Windows 7 with dot net fame work 3.5 or about)
Weight: 0.3kg(without PDA)/0.5kg(with PDA)

Contact:

GMC FOR GLASS INDUSTRY – France
F-69200 Vénissieux
Guy Marmonier guy.marmonier@gmcforglass.fr
www.gmcforglass.fr